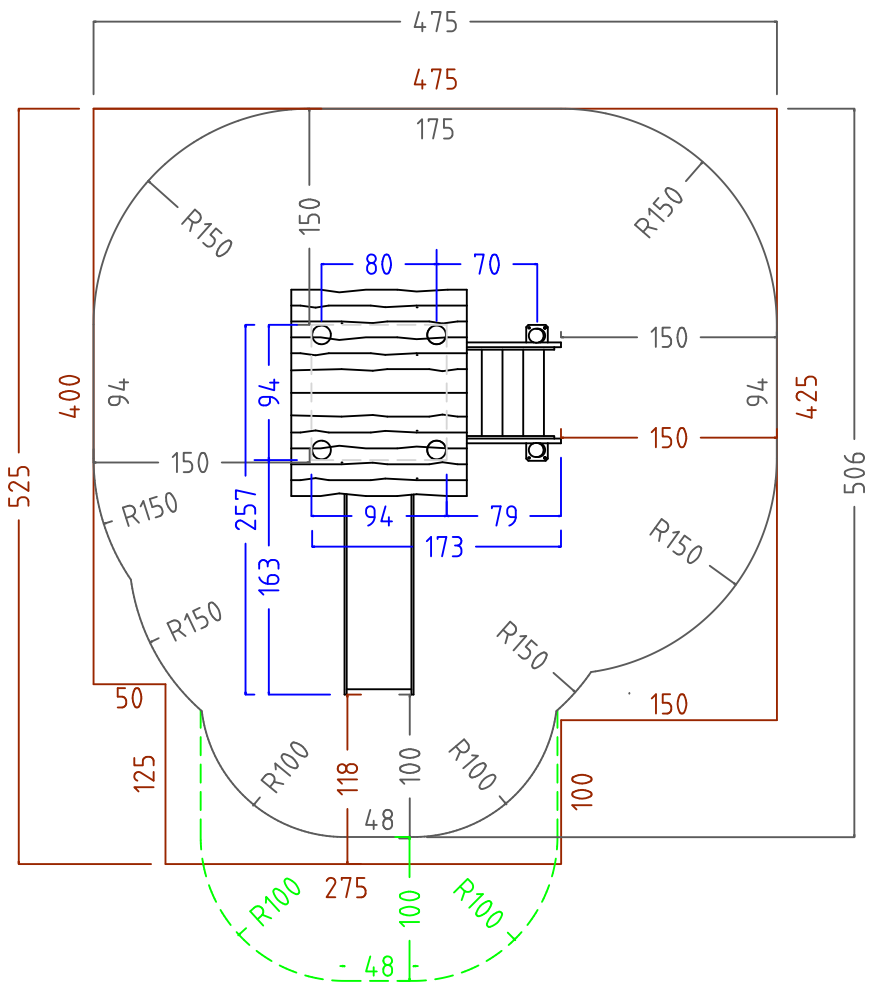

Area sicurezza / Security area 19,50mq

UNI EN 1177 La norma consiglia 23mq di antitrauma sp. 30mm, la pavimentazione antitrauma non è necessaria se posato su prato o terreno naturale

UNI EN 1177 This norm suggest 23 square meters of safety matting, thickness 30mm. The safety matting is not necessary, if the It is placed on grass or natural soil

Area libera da impedimenti (scivoli tipo 1 prato o terreno naturale richiesto)
free of obstacles area (for slides type 1 grass or natural soil is required)

modifiche / amendments :				scala / scale : —
nr°	data/date	pos	descrizione/description	firma sign
01				
02				
03				
03				

misure espresse in / dimensions are estabilished in : CM.

tolleranze generali applicate / general tolerances : :
- sezione/diametro legname impregnato ±0.5 (cm)
- lunghezza legname impregnato ±1% (lungh. totale)
- lavorazioni legname impregnato ±0.2 (cm)
- componenti in metallo ±1 (mm)
- componenti in materiali plastici ±1.5 (mm)
- section/diameter of treated wood ±0.5 (cm)
- length of treated wood ±1% (on the total length)
- processing on treated wood ±0.2 (cm)
- metal elements ±1 (mm)
- plastic elements ±1.5 (mm)

Le colorazioni dei componenti raffigurati sono solo indicative e potranno variare a no/ discrezione. Il presente elaborato grafico è da ritenersi indicativo. La sua reale fattibilità deve essere preventivamente verificata in loco prima della conferma d'ordine. Nessuna responsabilità pertanto sarà da attribuirsi alla scrivente.

The colours that are visible in the rendering are just illustrative and can be modified. The graphic design as well is illustrative, and customers are compelled to verify the equipments real feasibility before finalizing the order. We do not accept claims for similar themes.

ROLZIGHO

denom. / name : pianta sicurezza / security plant

nr. dis. / draft nr. : -

codice / code : xra90

luogo / place : Mezzolombardo

data / date : 20/05/19

esecuzione/verifica/ approvazione : created/checked/approved by :