


HC = altezza di caduta / free fall height

NB: all' interno dell' AREA DI IMPATTO non deve essere presente nessun oggetto, ostacolo o dislivello
PAY ATTENTION: inside the IMPACT area no object, obstacle or difference in height must be present

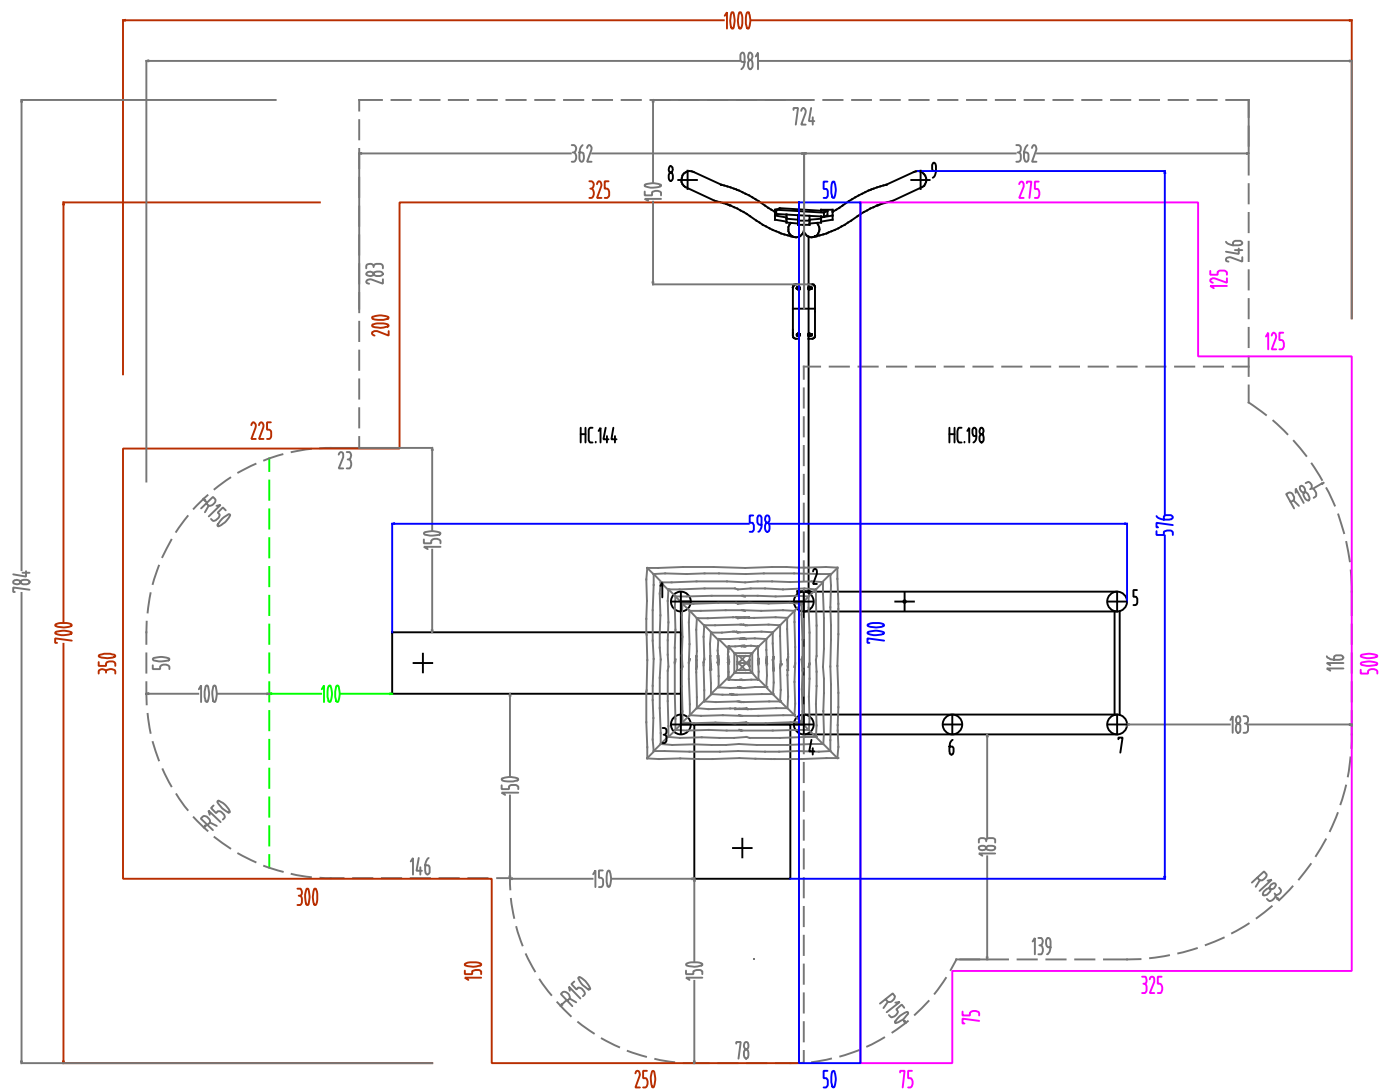

24 gomma HC min. 198 cm. mq / rubber safety matting HC min. 198 cm. sm.

if the area in front of the slide is free of obstructions and there is grass or natural terrain, it is possible to reduce the rubber by 3.5 sm.

modifiche / amendments :				scala / scale : -	misure espresse in / dimensions are established in : CM.			
nr°	data/date	pos	descrizione/description	firma sign	infornare general applicata / general treatment: • sezione/diametro legname impregnato ≥ 0.5 (cm) • lunghezza legname impregnato $\geq 1\%$ (lungh. totale) • lavorazioni legname impregnato ≥ 0.2 (cm) • componenti in metallo ≥ 1 (mm) • componenti in materiali plastici ≥ 1.5 (mm)	la colorazione dei componenti rifinitissimi sono solo indicative e potranno variare a vol./decrezione. Il presente elaborato grafico è ritenuto indicativo. La sua reale fattibilità deve essere preventivamente verificata in loco prima della conferma d'ordine. Messaggio responsabilità pertanto sarà da attribuirsi allo scultore. The colors that are visible in the rendering are just illustrative and can be modified. The graphic design as well is illustrative, and customers are compelled to verify the equipment's real feasibility before finalising the order. We do not accept claims for similar themes.	denom. / name :	pianta sicurezza / security plant
01							nr. dis. / draft nr. :	code / code : xrm100rap
02							luogo / place :	Mezzolombardo
03							data / date :	09/01/24
03							esecuzione/verifica approvazione : created/checked/approved by :	Slomp M.