
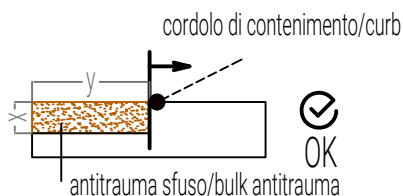



PIANTA ANTITRAUMA SFUSO/LOOSE ANTI-TRAUMA PLANT

 area libera da impedimenti minimo prato/terreno naturale/area free of impediments minimum meadow/natural terrain

 antitrauma sfuso spessore min. 30 cm. mq. 32.25/bulk anti-trauma min. thickness 30 cm. sq. m. 32.25

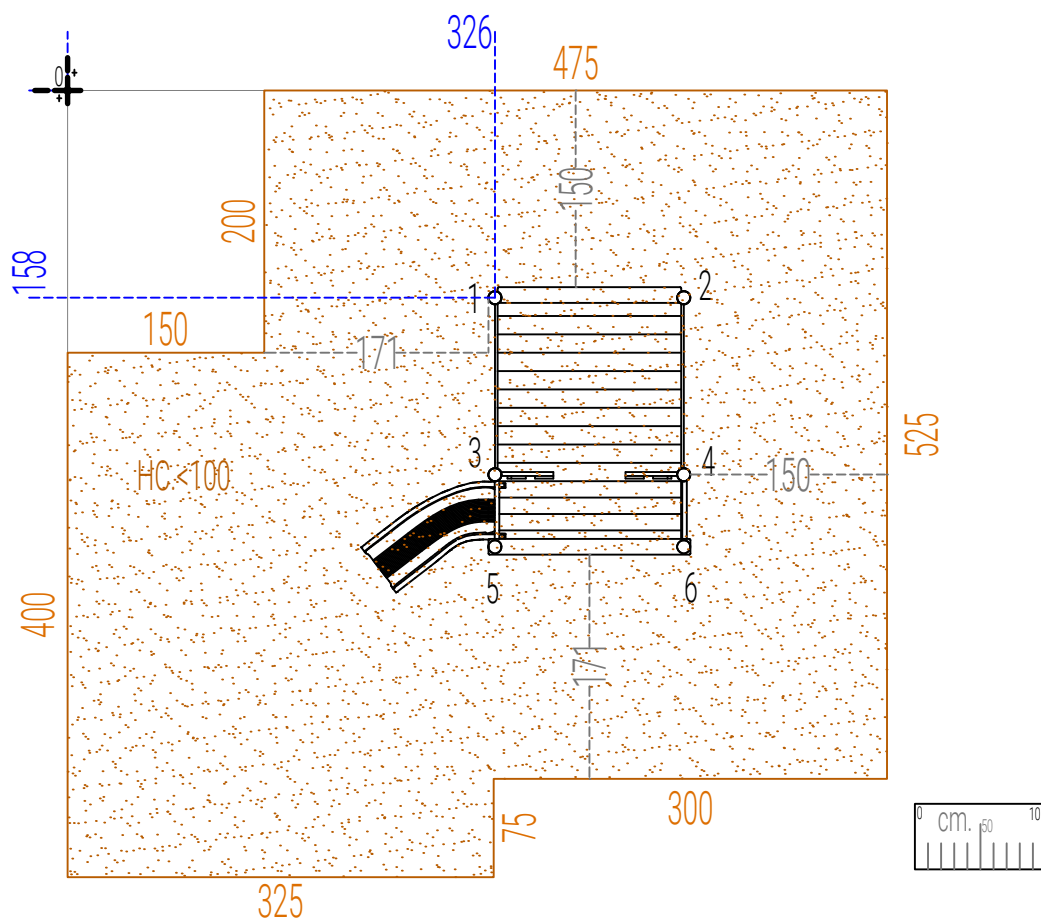

In caso di cordolo in Robinia non uniforme mantenerlo esternamente all'area di impatto/In case of non-uniform Robinia curb keep it outside the impact area.

! IN CASO DI ANTITRAUMA COLATO!/ IN THE CASE OF CAST RUBBER ANTITRAUMA:

L'applicazione del materiale antitrauma colato deve garantire uno spessore uniforme su tutta la superficie di impatto/Application of the poured anti-trauma material should ensure uniform thickness over the entire impact surface.

! Per approfondimenti consultare la scheda sul posizionamento dei cordoli dettagliata in allegato/See the detailed curb placement sheet attached for more details.

 Origine/Source

modifiche / amendments :				scala / scale : -		misure espresse in / dimensions are established in : cm.					
nr°	data/date	pos	descrizione/description	autore	toleranze generali applicate / general tolerances :				denom. / name :		
01					● sezione/diametro legname impregnato: 0.5 (cm) ± ● lunghezza legname impregnato: 1% (lunghezza totale) ± ● lavorazione legname impregnato: 0.2 (cm) ± ● componenti in metallo: 1 (mm) ± ● componenti in materiali plastici: 1.5 (mm) ±				Pianta Antitrauma Sfuso / Loose Safety Matting Plant		
02									nr dis. / draft nr. : -		
03					● section/diameter of treated wood: 0.5 (cm) ± ● length of treated wood: 1% (on the total length) ± ● processing on treated wood: 0.2 (cm) ± ● metal elements: 1 (mm) ± ● plastic elements: 1.5 (mm) ±				codice / code : xm12		
04									luogo / place : Mezzolombardo (TN)		
									data / date : 19/09/2024		
									esecuzione/verifica/ approvazione : Miriam Ilou		
									created/checked/approved by :		