

area di impatto min. m² / impact area min. m² = 55.85 mq

UNI EN 1177: la norma richiede antitrauma m²(con HIC <100 cm. minimo terreno naturale o prato)/ this norm request m² of safety matting (HC<100 cm grass or natural soil si required) =37.56 m²


Area antitrauma sfudo mq-profondità min./loose safety matting sm.-depth. min = 43.57 m², profondità 30 cm

estensione area di impatto (prato o terreno naturale richiesto)/impact area extension (grass or natural soil is required)

NB: all' interno dell' AREA DI IMPATTO o ESTENSIONE AREA IMPATTO non deve essere presente nessun oggetto, ostacolo o dislivello

PAY ATTENTION: inside the IMPACT or EXTENSION area no object, obstacle or difference in height must be present

HC = altezza di caduta / free fall height <150

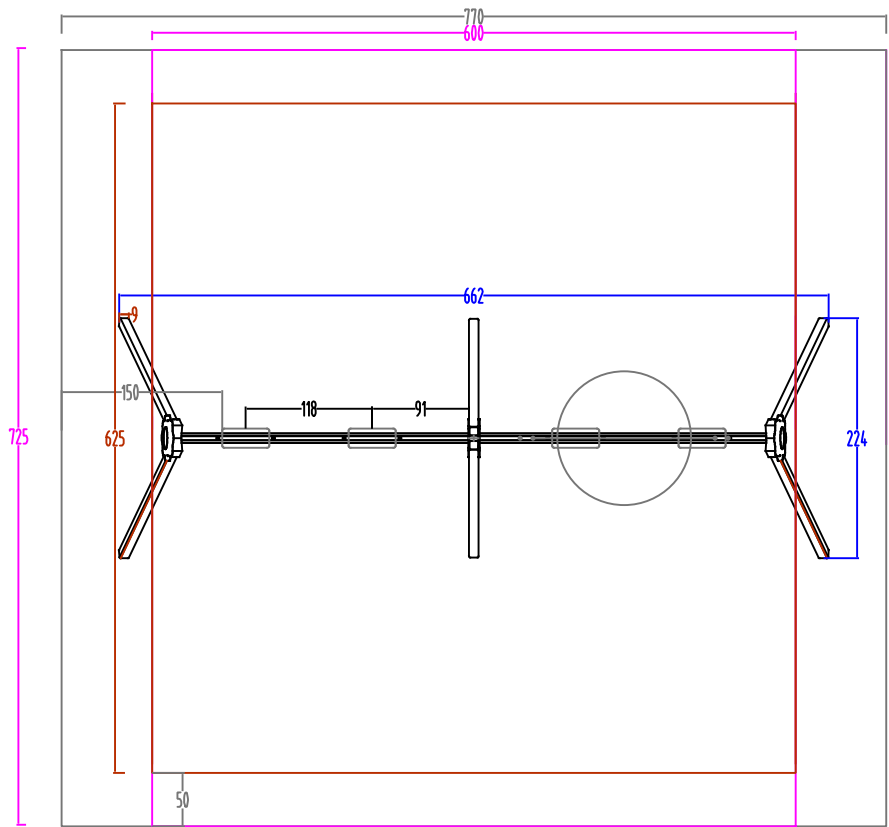

modifiche / amendments:					disegno approvato / dimension are established on		BOLZHOFF	
n°	data/date	pos	descrizione/description	firma/sign	disegno approvato / dimension are established on	disegno approvato / dimension are established on	data / date	planta sicurezza / security plant
01	15/03/2014		Correzione area di sicurezza per allungamento trave		disegno approvato / dimension are established on	disegno approvato / dimension are established on	nr. dis. / draft nr.:	calice / calc:
02					disegno approvato / dimension are established on	disegno approvato / dimension are established on		
03					disegno approvato / dimension are established on	disegno approvato / dimension are established on	lungo / plans:	data / date:
03					disegno approvato / dimension are established on	disegno approvato / dimension are established on		15/03/2014