



PIANTA ANTITRAUMA IN GOMMA/RUBBER ANTI-TRAUMA PLANT

gomma antitrauma/rubber anti-trauma :

 altezza di caduta h 119 cm mq. 23.37/Fall height 119 cm sq.m. 23.37

 area libera da impedimenti (nessun cordolo, oggetto o dislivello) minimo prato/terreno naturale/
Area free of obstructions (no curbs, objects or unevenness) minimum lawn/natural terrain

all'interno dell' area di impatto non deve essere presente nessun oggetto, ostacolo o dislivello/
within the impact area there shall be no object, obstacle or height difference

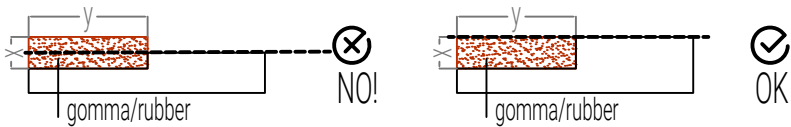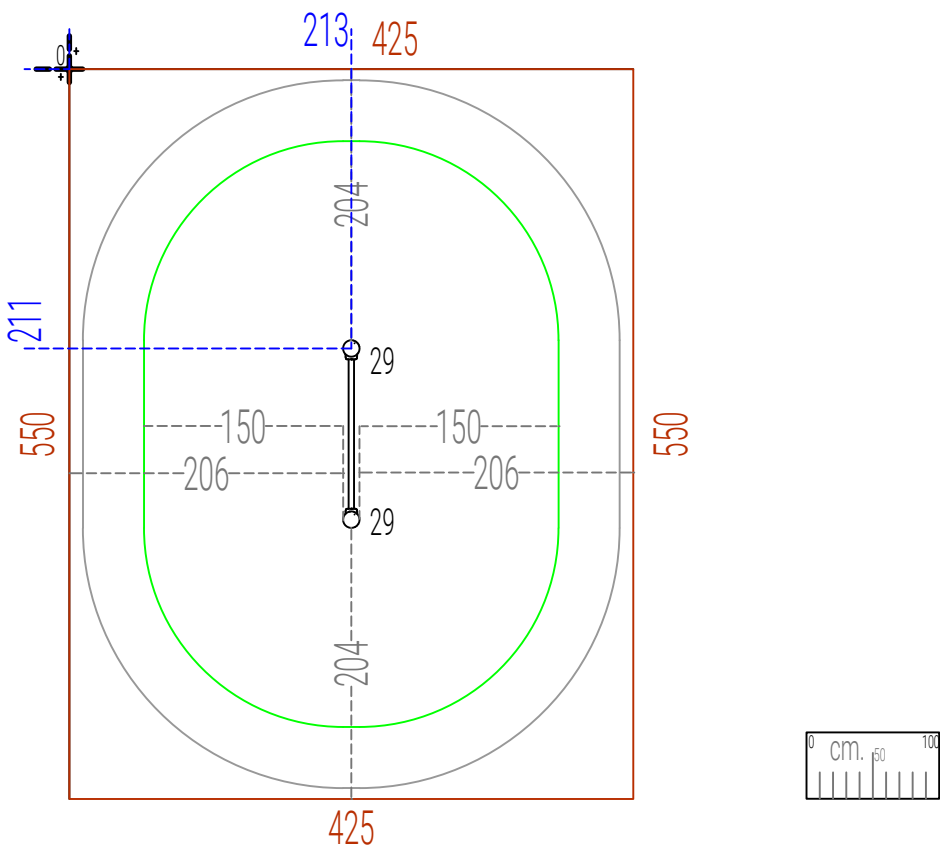

! IN CASO DI ANTITRAUMA COLATO!/ IN CASE OF CAST RUBBER ANTITRAUMA:

L'applicazione del materiale antitrauma colato deve garantire uno spessore uniforme su tutta la superficie di impatto/Application of the poured anti-trauma material should ensure uniform thickness over the entire impact surface.

! Per approfondimenti consultare la scheda sul posizionamento dei cordoli dettagliata in allegato/See the detailed curb placement sheet attached for more details.

 Origine/Source

modifiche / amendments :				scala / scale : -		misure espresse in / dimensions are established in : cm.			
nr°	data/date	pos	descrizione/description	autore	Tolleranze generali applicate / general tolerances:		denom. / name :		
01					● sezione/diametro legname impregnato 0.5 (cm) ± ● lunghezza legname impregnato 1% (1%h/ totale) ± ● lavorazioni legname impregnato 0.2 (cm) ± ● componenti in metallo 1 (mm) ± ● componenti in materiali plastici 1.5 (mm) ±		Pianta Antitrauma in Gomma / Rubber Safety Matting Plant		
02							nr. dis. / draft nr. :	codice / code : xsp166	
03							luogo / place :	data / date : 7/01/2025	
04					● section/diameter of treated wood 0.5 (cm) ± ● length of treated wood 1% (on the total length) ± ● processing on treated wood 0.2 (cm) ± ● metal elements 1 (mm) ± ● plastic elements 1.5 (mm) ±		esecuzione/verifica/ approvazione : created/checked/approved by :		