


area sicurezza/security area 18,82 m²

UNI EN 1177 : a norma consigliati mq.22,25 antitrauma sp. mm.65

UNI EN 1177 : this norm suggest 22,25 square meters of safety matting, thickness 65 mm.

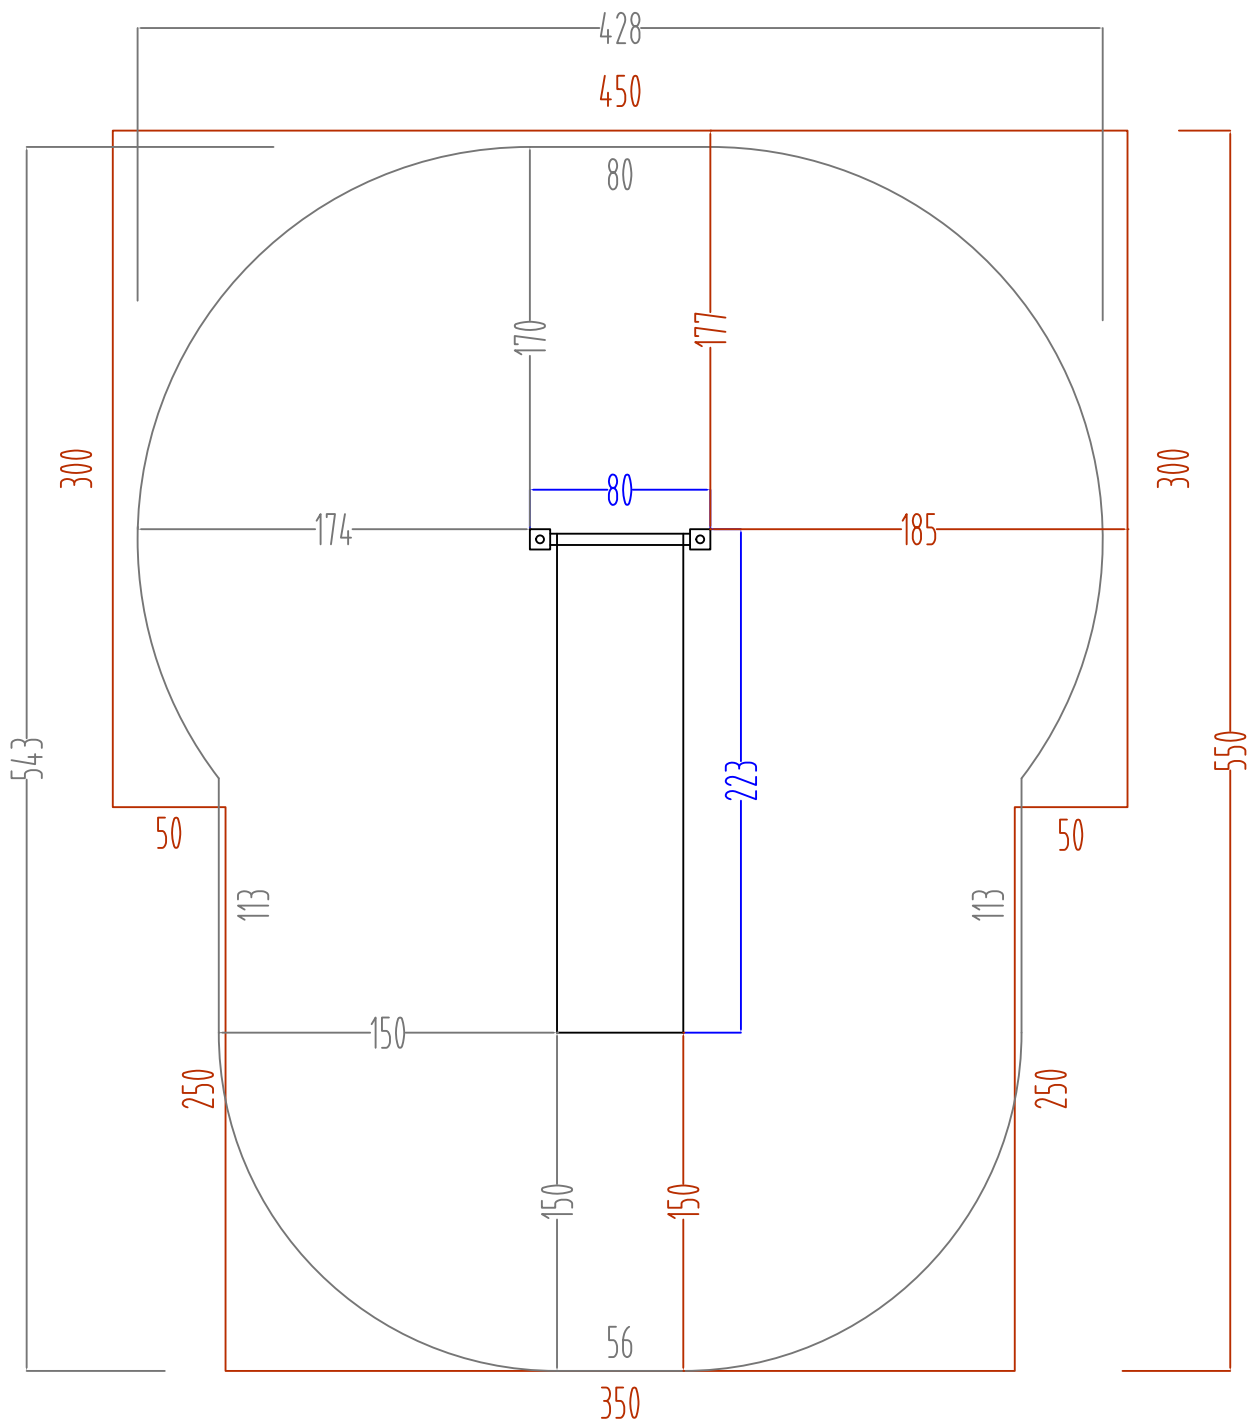

modifiche / amendments :				scala / scale : -		misure espresse in / dimensions are established in : CM.		HOLZHOF 	
nr°	data/date	pos	descrizione/description	firma sign		denom. / name : pianta sicurezza / security plant			
01						nr. dis. / draft nr. : 1055			
02						codice / code : xsp2			
03						luogo / place : Mezzolombardo			
03						data / date : 07/05/20			
						esecuzione/verifica/ approvazione : created/checked/ approved by : 			

Inferenze generali applicate / general inferences : • sezione/diametro legname impregnato: 0.5 (cm) • lunghezza legname impregnato: 1% (lung. totale) • lavorazioni legname impregnato: 0.2 (cm) • componenti in metallo: 1 (mm) • componenti in materiali plastici: 15 (mm)						In colorazioni dei componenti raffigurati sono solo indicative e potranno variare a noi/ discrezione. Il presente elaborato grafico è da ritenersi indicativo. La sua reale fattibilità deve essere preventivamente verificata in loco prima della conferma d' ordine. Nessuna responsabilità pertanto sarà da attribuirsi alla scrivente. The colours that are visible in the rendering are just illustrative and can be modified. The graphic design as well is illustrative, and customers are compelled to verify the equipment's real feasibility before finalising the order. We do not accept claims for similar themes.					
• section/diameter of treated wood: 0.5 (cm) • length of treated wood: 1% (on the total length) • processing on treated wood: 0.2 (cm) • metal elements: 1 (mm) • plastic elements: 15 (mm)											