

In compliance with Regulation 305/2011/EU of the European Parliament and of the Council of 9 March 2011 (the Construction Products Regulation - CPR) this certificate applies to the construction product

Strength graded structural timber with rectangular cross section

according to the product specification listed in the current addendum to this certificate placed on the market

Company

HOLZHOF S.R.L.

Via Rupe 33

IT-38017 Mezzolombardo (TN)

and produced in the manufacturing plant

IT-38017 Mezzolombardo (TN), Via Rupe 33

This certificate attests that all provisions concerning the assessment and verification of constancy of performance described in Annex ZA of the standard

EN 14081-1:2005 + A1:2011

under system 2+ are applied and that the factory production control is assessed to be in conformity with the applicable requirements.

CERTIFICATE OF CONFORMITY OF THE FACTORY PRODUCTION CONTROL

Certificate number: 1359-CPR-0262

Date of first issue: 16.11.2010


Date of issuance: 17.01.2019

This certificate will remain valid as long as neither the harmonised standard, the construction product, the AVCP methods nor the manufacturing conditions in the plant are modified significantly, unless suspended or withdrawn by the notified product certification body.

For the validity of this certificate see www.holzforschung.at.



Dr. Michael Golser
Authorised signatory

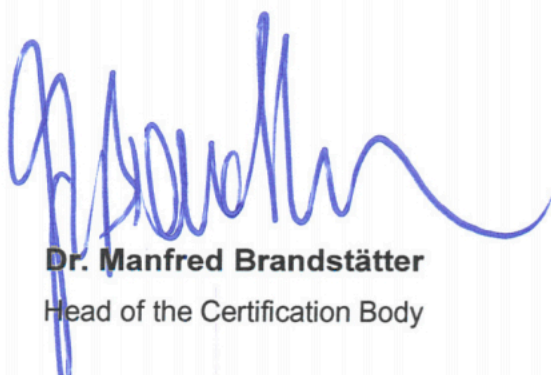

Dr. Manfred Brandstätter
Head of the Certification Body

Addendum to certificate 1359-CPR-0262

Date of issuance: 17.01.2019

Scope of certification:

Strength graded timber for structural applications according to classification of EN 1912

Wood species	Origin	Grading standard	Grading classes	Strength classes according to EN 338
PCAB – Picea abies Spruce	MNO	DIN 4074-1, Tab. 2	S7, S10, S13	C18, C24, C30
			S7K, S10K, S13K	C18, C24, C30
ABAL – Abies alba Fir	MNO	DIN 4074-1, Tab. 2	S7, S10, S13	C16, C24, C30
			S7K, S10K, S13K	C16, C24, C30
LADC – Larix decidua Larch	MNO	DIN 4074-1, Tab. 2	S7, S10, S13	C16, C24, C30
			S7K, S10K, S13K	C16, C24, C30
PNSY – Pinus sylvestris Pine	MNO	DIN 4074-1, Tab. 2	S7, S10, S13	C18, C24, C30
			S7K, S10K, S13K	C18, C24, C30
QCXE – Quercus petraea/ Quercus robur Oak	DE	DIN 4074-5	LS10+	D30
			LS10K+	D30
CTST – Castanea sativa Sweet chestnut	IT	UNI 11035-2	S	D24
Combination				
WPCA – Spruce, Fir	MNO	DIN 4074-1, Tab.2	S7, S10, S13	C16, C24, C30
			S7K, S10K, S13K	C16, C24, C30
WPPA – Spruce, Fir, Pine	MNO	DIN 4074-1, Tab.2	S7, S10, S13	C16, C24, C30
			S7K, S10K, S13K	C16, C24, C30

Additional mandated performances:

Fire behaviour:

D-s2, d0

Durability
(without wood preservative treatment):

according to EN 350-2